

Description

The **D900** Series is a large scale traditionally styled 8 sided cast aluminum luminaire. A Type III (**T3**) or Type V (**T5**) borosilicate glass refractive lens for optimal light distribution.

Installation

The luminaire will mount to a 3" OD post or tenon with 5/16" black oxide coated stainless steel set screws to ensure a solid connection.

Electrical

- High power factor ballast (HPF), core and coil type, pre-wired and tested
- Easy ballast pod access
- 4KV pulse rated porcelain socket
- Suitable for wet location
- Quick disconnect

Lens

- Type III Refractive borosilicate glass

Finish


Premium quality thermoset polyester powdercoat (see Finish Selection)



Ordering Guide

Luminaire	Light Distribution	Light Source	Voltage	Finish	Light Control Option
D900-T3	/	100HPS	- 120v	/ BLK	/ HSS
		100MH,150MH	208v	CLB,GRN	PCL
		175MH-PS,250MH-PS	240v	WHT,TBK	
		150HPS,250HPS	277v	ATC,GTG	
		PL-13,(2)PL13			
		CFL26,CFL32			
		CFL42			


Additional light sources, voltages, and custom colors are available. Contact factory for details.

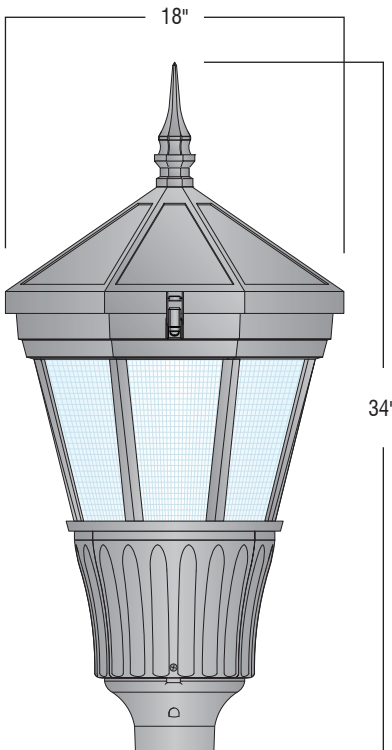


Light Sources

Wattage	Socket Type
50MH, 70MH,100MH,150MH	Medium
175MH-PS,250MH-PS	Mogul
50HPS,70HPS,100HPS	Medium
150HPS,250HPS	Mogul
PL-13	2-pin
CFL 26, 32, or 42	4-pin

Assembly Details

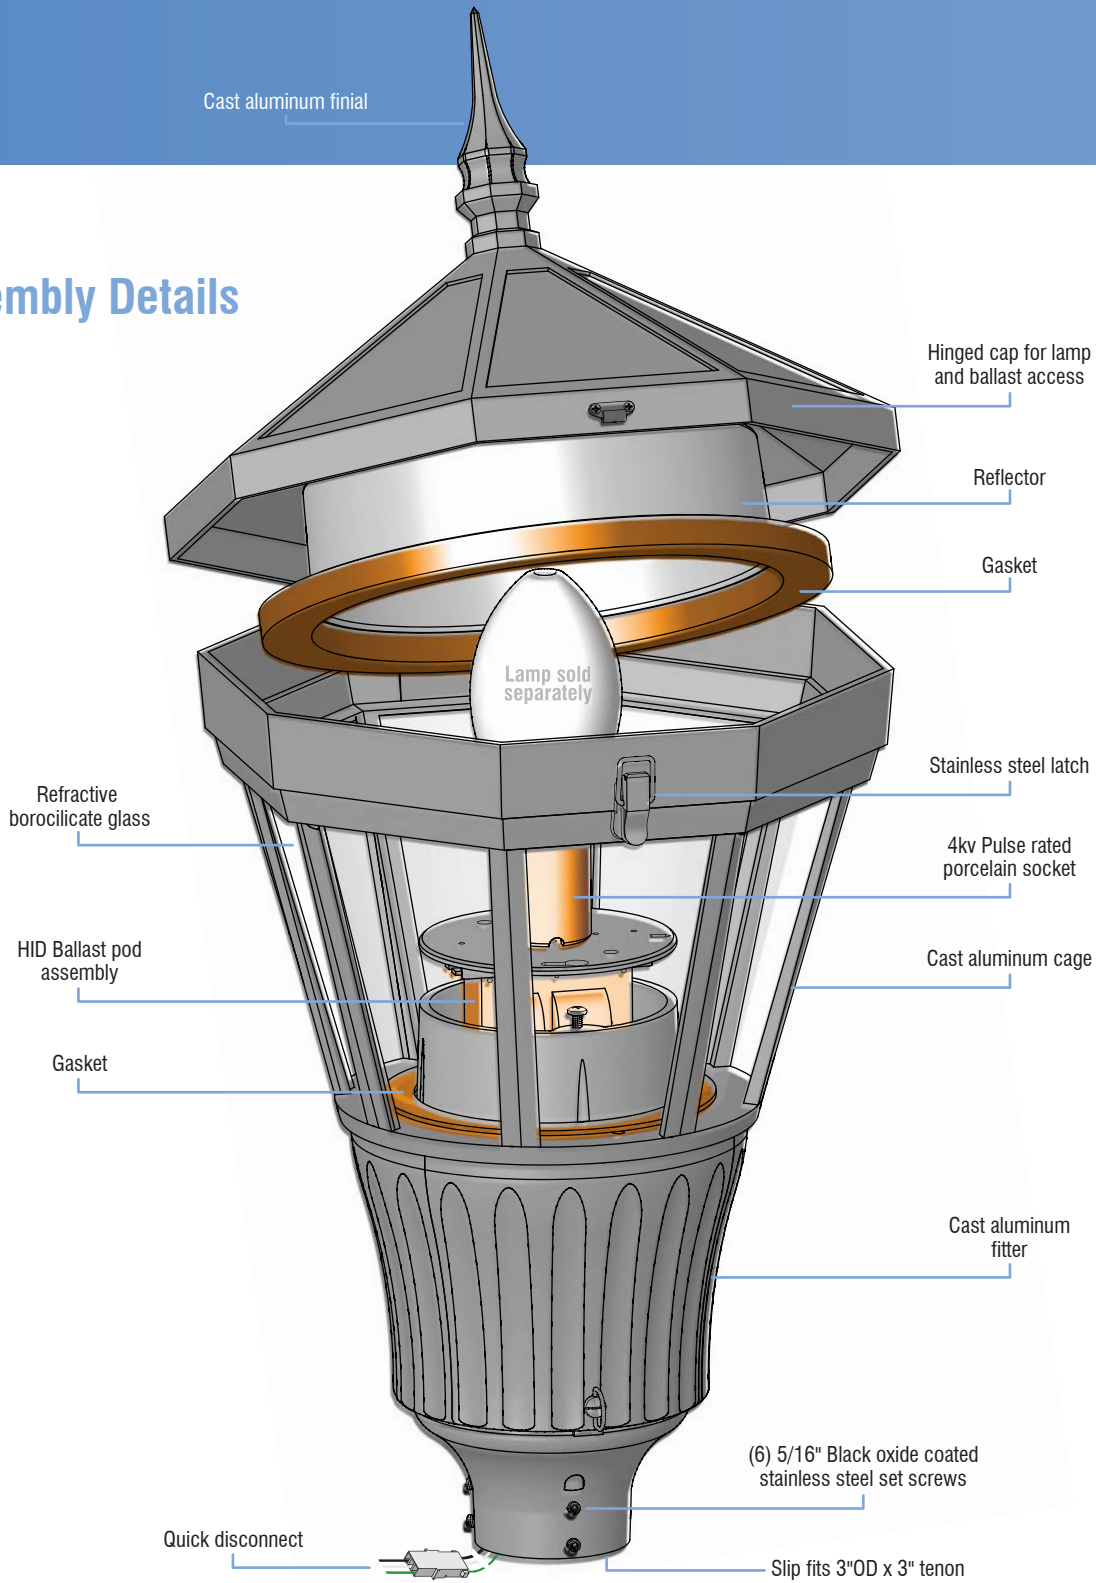


Option



HSS
House
Side
Shield

Standard Photometry

Type III (T3)

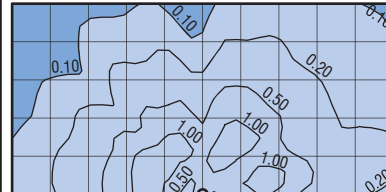

D900
Typical HID light source
14,000 Lumen
12' Mounting Height
Grid Spacing is 12'